

## PRODUCT SUBMITTAL

**Submitted to:**

Project:

Date of Submittal:

**Submitted by, Contact name:**

Company:

Address:

Phone:

Email:

Approved

Approved as Noted

Not Approved

Comments:

By:

Date:

---

List of items from Table A submitted for the project:

|  |
|--|
|  |
|--|

**Product Family: DWCH - Drywall Nail Cupped Head Diamond Point**

**Table A**

| Item Number | Gauge (#) | Wire Diameter | Head Size | Length     | Shank Type | Head Type   | Point Type         | Finish    | LBS/CTN | Application                     |
|-------------|-----------|---------------|-----------|------------|------------|-------------|--------------------|-----------|---------|---------------------------------|
| DWCH1316    | 13        | 0.091-in.     | 19/64-in. | 1-3/16-in. | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH138     | 13        | 0.091-in.     | 19/64-in. | 1-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH138-25  | 13        | 0.091-in.     | 19/64-in. | 1-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 25-lbs. | Attaching gypsum board to wood. |
| DWCH158     | 13        | 0.091-in.     | 19/64-in. | 1-5/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH178     | 13        | 0.091-in.     | 19/64-in. | 1-7/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH218     | 11.5      | 0.113-in.     | 3/8-in.   | 2-1/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH238GHP  | 11.5      | 0.113-in.     | 3/8-in.   | 2-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 12-lbs. | Attaching gypsum board to wood. |
| DWCH138G    | 12.5      | 0.099-in.     | 11/32-in. | 1-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH138G-25 | 12.5      | 0.099-in.     | 11/32-in. | 1-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 25-lbs. | Attaching gypsum board to wood. |
| DWCH138GHP  | 12.5      | 0.099-in.     | 11/32-in. | 1-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 12-lbs. | Attaching gypsum board to wood. |
| DWCH150G    | 12.5      | 0.099-in.     | 11/32-in. | 1-1/2-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH158G    | 12.5      | 0.099-in.     | 11/32-in. | 1-5/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH158GHP  | 12.5      | 0.099-in.     | 11/32-in. | 1-5/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 12-lbs. | Attaching gypsum board to wood. |
| DWCH178G    | 12.5      | 0.099-in.     | 11/32-in. | 1-7/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH238G    | 11.5      | 0.113-in.     | 3/8-in.   | 2-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH138T    | 13        | 0.091-in.     | 5/16-in.  | 1-3/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH158T    | 13        | 0.091-in.     | 5/16-in.  | 1-5/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH178T    | 13        | 0.091-in.     | 5/16-in.  | 1-7/8-in.  | Smooth     | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |
| DWCH138RS   | 13        | 0.091-in.     | 19/64-in. | 1-3/8-in.  | Ring Shank | Cupped Head | Long Sharp Diamond | Phosphate | 50-lbs. | Attaching gypsum board to wood. |

**Prefix:** X = 1-lb., V = 5-lb., VB = 5-lb. Bucket


**Description:** Phosphate-coated cupped-head drywall nails with long sharp diamond point used for attaching gypsum board to wood.

**Directions:** Install gypsum panels in accordance with ASTM C840 - *Standard Specification for Application and Finishing of Gypsum Board* and manufacturer's installation instructions/specifications.

**Corrosion Resistance:** Interior use only.

**Certifications:** All GRABBER® nail products are manufactured in facilities that are ISO 9001 certified. Cupped-head drywall nails with long sharp diamond point meet ASTM F1667 and ASTM C514 requirements.

**DWCH - Drywall Nail Cupped Head Diamond Point**

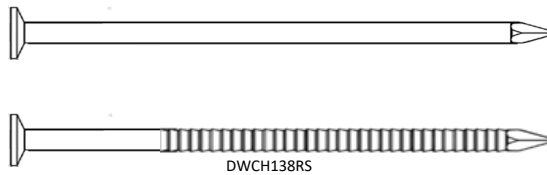

**TRADEMARKS:**

The following registered trademarks used herein are owned by Grabber Construction Products, Inc.:

GRABBER®

**NOTICE:**

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.