

Submittal Sheet

Submittal Sheet #112-03-26-04

Flat Head Stabber® Screws (222)

Product:	Item#	Description	Unit Pack
	S8150JBWYZ	8 x 1-1/2-in, Flat Head, Stabber®, Yellow Zinc, Bulk	4,000
	CS8150JBWYZ	8 x 1-1/2-in, Flat Head, Stabber®, Yellow Zinc, Collated	1,000
	S8150JBWZ	8 x 1-1/2-in, Flat Head, Stabber®, Clear Zinc, Bulk	4,000
	C10158JBWG2	10 x 1-5/8-in, Flat Head, Stabber®, GrabberGard®, Collated	1,000
	S8175JBWYZ	8 x 1-3/4-in, Flat Head, Stabber®, Yellow Zinc, Bulk	4,000
	CS10200JBWYZ	10 x 2-in, Flat Head, Stabber®, Yellow Zinc, Collated	1,000
	CS8175LRG	8 x 1-3/4-in, Flat Head, Stabber®, GrabberGard®, Collated	1,000
	CS8175LYZ	8 x 1-3/4-in, Flat Head, Stabber®, Yellow Zinc, Collated	1,000
	CS8200JBWYZ	8 x 2-in, Flat Head, Stabber®, Yellow Zinc, Collated	1,000
	CS8250JBWYZ	8 x 2-1/2-in, Flat Head, Stabber®, Yellow Zinc, Collated	1,000
	CS8300JBWYZ	8 x 3-in, Flat Head, Stabber®, Yellow Zinc, Collated	1,000

Screw Series	Designation	Head Type	Nominal Diameter	Nominal Head Diameter	Nominal Gauge- TPI	Nominal Length	Point (No#)	Thread Length	Drilling Capacity Min#	Drilling Capacity Max#	Coating
Stabber	Heavy Gauge Steel	Flat Head	0.164	0.354	#8-14	1.5	Streaker	1.25	22 ga.	16 ga.	Z, YZ
Stabber	Heavy Gauge Steel	Flat Head	0.164	0.354	#8-14	1.75	Streaker	1.5	22 ga.	16 ga.	YZ
Stabber	Heavy Gauge Steel	Flat Head	0.164	0.354	#8-14	2	Streaker	1.75	22 ga.	16 ga.	YZ
Stabber	Heavy Gauge Steel	Flat Head	0.164	0.354	#8-14	2.5	Streaker	2.25	22 ga.	16 ga.	YZ


NOTE: RG = GrabberGard® exterior grade coating
YZ = Yellow Zinc coating
CZ = Clear Zinc coating

Application: For attaching plywood or OSB to metal applications, 22-14 gauge or wood joists.
• Plywood or OSB to 22-16 gauge steel runners or wood joists


Description: Self tapping STREAKER® point is designed for penetration into 22-16 gaugesteel.
• Flat head provides a flush finished surface
• LOX® recess does not require a magnetic bit tip holder

Directions: Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 2,500.
• The Flat head is fully seated when the head is flush with the work surface.
• Overdriving may result in failure of the fastener or stripout of the work surface.
• The fastener must penetrate beyond the metal a minimum of three thread pitches.

Certifications: All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

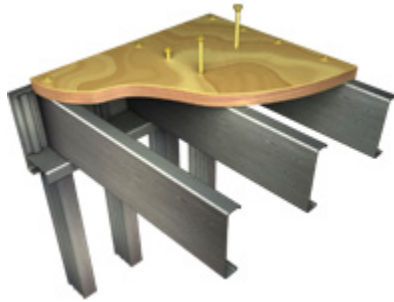

Flat Head Fine Thread Stabber®



SUBMITTAL APPROVALS:

.....
JOB NAME

CONTRACTOR

DATE

TRADEMARKS:

The following trademark used herein is owned by Grabber Construction Products, Inc.: GRABBER.

NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.

Flat Head Stabber® Screws (222)



PRODUCT SPECIFICATIONS

Fastener Classification	Heavy Gauge Metal (18 or thicker)
Fastener Head	Flat
Fastener Drive	LOX #2
Fastener Gauge	#8, #10
Fastener Point	Streaker, Self Piercing Point
Fastener Package Type	Packaged Screws, Collated Screws (for automated feed systems)
Fastener Package Weight	Bulk Box
Fastener TPI	14
Fastener Coating	Yellow Zinc, Clear Zinc, GrabberGard, GrabberGard Gray
Fastener Color	Gray, Yellow

STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, no red rust
Yellow Zinc	Salt Spray Results	ASTM B117	48 hours, no red rust
Clear Zinc	Salt Spray Results	ASTM B117	24 hours, no red rust
Dracrotized	Salt Spray Results	ASTM B117	500 hours, no red rust
GrabberGard	Salt Spray Results	ASTM B117	1,000 hours, no red rust
GrabberGard	Kesternich Results	DIN 50018, 2.0L	15 cycles, no red rust
304 Stainless Steel	Salt Spray Results	ASTM B117	1000 hours, no red rust
316 Stainless Steel	Salt Spray Results	ASTM B117	1500 hours, no red rust

Grabber's approved mill keeps tight control over all production standards and processes. Grabber's mill is ISO 9001, ISO 14001 and ICC-ES certified compliant ensuring Grabber fasteners meet or exceed the highest industry standards.