

**Light Gauge Metal (20-25)****Product #214****Trim Head STREAKER®** (1 OF 2)

**Attaches interior wood to light gauge metal and wood. Streaker point means quick and easy penetration while the smaller, less noticeable head provides a finished look.**

**Finish - Black/Gray Phosphate**



Trim  
Head



23° Streaker®  
Point



#1 Square  
Drive

**APPLICATIONS**

- ▶ Wood trim over single and double-layer gypsum board to 20 to 25 gauge steel studs and track
- ▶ Wood trim over single and double-layer gypsum board to wood studs

**PRODUCT FEATURES**

- ▶ A fine thread screw for finishing applications
- ▶ 15 threads per inch
- ▶ Super sharp, 23° STREAKER® point, designed to penetrate steel quickly and easily
- ▶ #1 square recess drive

**SPECIFICATIONS**

- ▶ Gauge – #7 and #8
- ▶ Lengths – 1-5/8" to 3"
- ▶ Head Type – Trim
- ▶ Recess Type – #1 Phillips or #1 square
- ▶ Thread Type – Double Lead
- ▶ Finish – Gray Phosphate, Clear Zinc, GRABBERGARD
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified and approved factory.

**INSTALLATION GUIDELINES**

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and 2500 RPM.
- ▶ The Trim head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or stripout of the work surface.
- ▶ The fastener must penetrate beyond the metal a minimum of three thread pitches

**Light Gauge Metal (20-25)**

**Product #214**

**Trim Head STREAKER<sup>®</sup>** (2 OF 2)

**PRODUCT SIZES AND ORDERING INFORMATION**

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
17S100	#7x1"	25 mm	10 M	29.00(lbs)
17S	#7x1-5/8"	41 mm	10 M	49.00(lbs)
18S	#7x2-1/4"	57 mm	5 M	34.00(lbs)
17S76	#8x3"	76 mm	2 M	21.00(lbs)

\*1lb Box and 5lb Box screw packaging option available on selected items.

**PRODUCT DIMENSIONS (MILLIMETERS)**

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#7	5.30	1.20	#1	2.93	2.40	3.75	15
	5.80	1.50		2.97	2.55	3.90	
#8	5.30	1.20	#1	3.18	2.80	4.00	15
	5.80	1.50		3.22	3.00	4.20	

**STANDARD CORROSION TEST RESULTS**

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, No Red Rust


**SHEET STEEL GAUGES**

Gauge No.	Decimal Equivalent	Millimeter Equivalent
20	0.0396"	1 mm
25	0.0188"	.6 mm

**PULL-OUT TEST DATA**

Screw Gauge	Metal Gauge	Tension (lbs.)	Shear (lbs.)
#7	20	222	817
	25	100	245
#8	20	342	785
	25	145	325

\*\*GRABBER fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

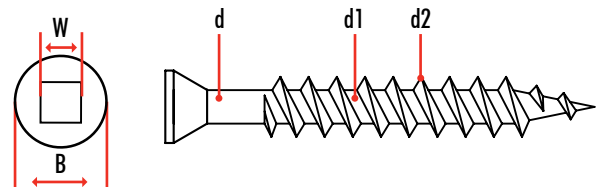

All GRABBER<sup>®</sup> screw products are manufactured in facilities that are ISO 9001 certified. ©2012 GRABBER Construction Products, Inc. GRABBER<sup>®</sup>, STREAKER<sup>®</sup>, DRIVALL<sup>®</sup>, LOX<sup>®</sup>, GRABBERGARD<sup>®</sup> and SCAVENGER<sup>®</sup> are registered trademarks of Grabber Construction Products, Inc.

