


Light Gauge Metal (20-25)

Product #224

GRABBER® Scavenger® High/ Low Threaded Screws (1 OF 2)

Designed for drywall to light metal or wood applications.

Finish - Black/Gray Phosphate

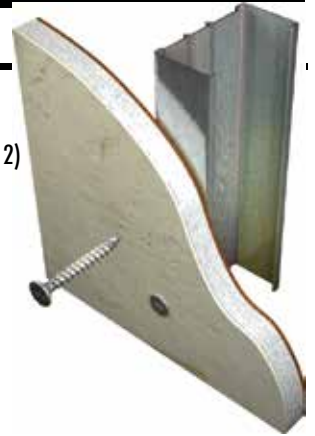

Scavenger®
Head



23° Streaker®
Point



#2 Phillips
Drive

APPLICATIONS

- ▶ Drywall to light metal or wood

PRODUCT FEATURES

- ▶ Super sharp 30° STREAKER® Point you get quick and easy penetration into metal studs.
- ▶ #2 Phillips recess

SPECIFICATIONS

- ▶ Gauge - #6 - #8
- ▶ Length - 1" to 3"
- ▶ Head Type - Scavenger
- ▶ Recess Type - #2 Phillips
- ▶ Thread Type - Alternating High/Low Thread
- ▶ Finish - Black/Gray Phosphate
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified.

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance - 4 amps minimum and RPM range of 0 to 4,000.
- ▶ The Bugle head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or strip out of the work surface.

Light Gauge Metal (20-25)

Product #224

GRABBER® Scavenger® High/Low Threaded Screws (2 OF 2)

PRODUCT SIZES AND ORDERING INFORMATION

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
168SHL	#6x1"	25 mm	10 M	29.00(lbs)
368SHL	#6x1-1/4"	32 mm	8 M	30.00(lbs)
268SHL	#6x1-1/8"	28 mm	10 M	32.00(lbs)
468SHL	#6x1-5/8"	41 mm	5 M	22.00(lbs)
768SHL	#7x2"	51 mm	3.5 M	19.00(lbs)
968SHL	#8x2-1/2"	63 mm	2.5 M	21.00(lbs)
1168SHL	#8x3"	76 mm	3 M	22.00(lbs)

*1lb Box and 5lb Box screw packaging option available on selected items.


STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, No Red Rust

PULL-OUT TEST DATA

Screw Gauge	Metal Gauge	Tension (lbs.)	Shear (lbs.)
#6	20	237	557
	25	139	278
#7	20	222	817
	25	100	245
#8	20	342	785
	25	145	325

**GRABBER fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

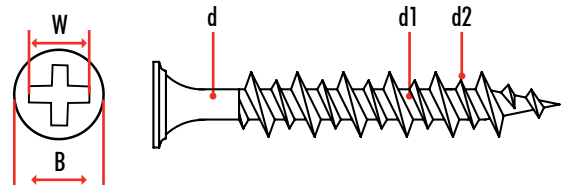

All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. The fasteners comply with the performance requirements of ASTM C1002. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

