

## Stainless Steel

Product #283SS

**LOX® Stainless Steel Trim Head 316 Wood Screws** (1 OF 2)

Featuring LOX® advanced driver system engineered for high-torque applications. LOX® grabs hard and sinks even harder, giving you positive joint reliability with predictable results every time.

Finish - 316 Stainless Steel

Trim  
HeadType 17  
Point

LOX #2

**APPLICATIONS**

- ▶ Use LOX® Wood Screws with Stainless for any Exterior Project, Decks, fences, Siding, Lattice, Docks & More

**PRODUCT FEATURES**

- ▶ LOX® 2 recess for a sure driving experience with exceptional bit life
- ▶ Flat head or trim head with countersinking nibs
- ▶ Type 17 self-drilling point
- ▶ Marine grade 316 stainless steel for maximum corrosion resistance
- ▶ Trim Head with countersinking nibs

**SPECIFICATIONS**

- ▶ Gauge - #8 and #10
- ▶ Length – 1-1/2" to 4"
- ▶ Head Type – Flat
- ▶ Recess Type – LOX® #2
- ▶ Thread Type – Single Lead
- ▶ Finish – 316 Stainless Steel
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified and approved factory.

**INSTALLATION GUIDELINES**

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 4,000.
- ▶ The Trim head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or stripout of the work surface.
- ▶ The fastener must penetrate beyond the wood a minimum of three thread pitches.

**Stainless Steel**

**Product #283SS**

**LOX® Stainless Steel Trim Head 316 Wood Screws** (2 OF 2)

**PRODUCT SIZES AND ORDERING INFORMATION**

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
W8158S316	#8x1-5/8"	41 mm	2450	16.00(lbs)
W8214S316	#8x2-1/4"	57 mm	1750	16.00(lbs)
W8300S316	#8x3"	76 mm	1750	21.00(lbs)

**Pull-out Test Data\*\***

Gauge	2x2 Douglas	2x4 Redwood	1x3 Clear Pine	1" Plywood	3/4" Particleboard
#8	373	377	358	265	227
#10	404	402	396	314	319



\*\*GRABBER fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

**PRODUCT DIMENSIONS (MILLIMETERS)**

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#7	5.30	1.20	#1	2.93	2.40	3.75	15
	5.80	1.50		2.97	2.55	3.90	
#8	5.30	1.20	#1	3.18	2.80	4.00	15
	5.80	1.50		3.22	3.00	4.20	

**STANDARD CORROSION TEST RESULTS**

Finish	Test	Standard/Protocol	Results
304 Stainless Steel	Salt Spray Results	ASTM B117	1,000 hours, no red rust

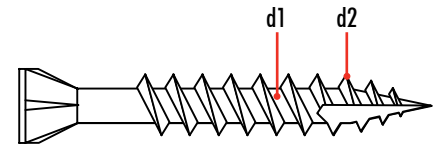

All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

