

EXTERIOR WOOD**Product #286****AnyDeck Composite Screws,
LOX® Drive** (1 OF 2)

Designed and engineered to work with all types of composite materials where surface mounted fasteners are recommended.

Finish - GRABBERGARD®



Undercut
Head



GRABBER
Point



LOX #2

APPLICATIONS

- ▶ All types of composite materials
- ▶ Outdoor projects such as decks, docks, fences, and gazebos

PRODUCT FEATURES

- ▶ Undercut head design leaves crisp clean finish with no mushrooms and burrs.
- ▶ Reverse buttress fine thread design gathers loose materials and pulls it down and out of sight.
- ▶ Coarse threads and extra sharp points provide great holding power and fast starts.
- ▶ LOX® recess drive does not require a magnetic bit tip holder

SPECIFICATIONS

- ▶ Gauge - #9 and #10
- ▶ Length – 2-1/2" to 3"
- ▶ Head Type – Undercut
- ▶ Recess Type – LOX #2
- ▶ Finish – GRABBERGARD™ ASTM rated at 1000 hrs
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified.

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 4,000.
- ▶ The Flat head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or strip out of the work surface.

EXTERIOR WOOD

Product #286

**AnyDeck Composite Screws,
LOX® Drive** (2 OF 2)

PRODUCT SIZES AND ORDERING INFORMATION

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
BC9250G	#9x2-1/2"	63 mm	2 M	24.00(lbs)
BC9250R	#9x2-1/2"	63 mm	2 M	27.00(lbs)
BC9300B	#9x3"	76 mm	2 M	27.00(lbs)
BC9300G	#9x3"	76 mm	2 M	27.00(lbs)
BC9300R	#9x3"	76 mm	2 M	27.00(lbs)

*5lb Box and Collated screw packaging option available on selected items.

PRODUCT DIMENSIONS (MILLIMETERS)

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#6	8.00	0.50	#2	2.68	2.25	3.75	8
	8.50	0.80		2.72	2.45	3.95	
#7	8.00	0.50	#2	2.93	2.50	4.05	8
	8.50	0.80		2.97	2.80	4.30	
#8	8.00	0.50	#2	3.18	2.80	4.30	8
	8.50	0.80		3.22	3.10	4.60	
#10	8.50	0.50	#2	3.78	3.20	5.00	8
	8.90	0.80		3.82	3.50	5.30	


PULL-OUT TEST DATA

Gauge	2x2 Douglas Fir	2x4 Redwood	1x3 Clear Pine	1" Plywood	3/4" Particleboard
#8	373	377	358	265	227
#9	380	391	375	280	263
#10	404	402	396	314	319

**GRABBER® fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER® Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
GRABBERGARD	Salt Spray Results	ASTM B117	1,000 hours, no red rust
GRABBERGARD	Kesternich Results	DIN 50018, 2.0L	15 cycles, no red rust

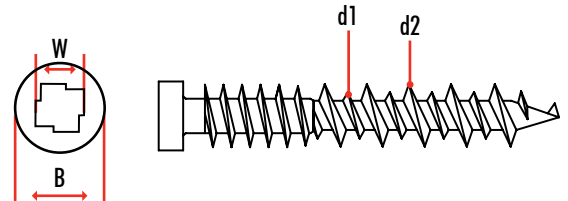

All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

