

Stainless Steel

Product #286SS

AnyDeck™ Stainless Steel Composite Screws, LOX® Drive (1 OF 2)

Designed and engineered to work with all types of composite materials where surface mounted fasteners are recommended.

Finish - 316 Stainless Steel

Undercut
HeadQuickGrab
Point

LOX #2

APPLICATIONS

- ▶ All types of composite materials
- ▶ Outdoor projects such as decks, docks, fences, and gazebos

PRODUCT FEATURES

- ▶ Undercut head design leaves crisp clean finish with no mushrooms and burrs.
- ▶ Reverse buttress fine thread design gathers loose materials and pulls it down and out of sight.
- ▶ Coarse threads and extra sharp points provide great holding power and fast starts.

SPECIFICATIONS

- ▶ Gauge - #8 and #10
- ▶ Length – 1-1/2" to 4"
- ▶ Head Type – Flat
- ▶ Recess Type – LOX® #2
- ▶ Thread Type – Single Lead
- ▶ Finish – 316 Stainless Steel
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified.

INSTALLATION GUIDELINES

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and 2500 RPM.
- ▶ Overdriving may result in failure of the fastener or strip out of the work surface.

Stainless Steel

Product #286SS

AnyDeck™ Stainless Steel Composite Screws, LOX® Drive (2 OF 2)

PRODUCT SIZES AND ORDERING INFORMATION

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
BC10250S	#10x2-1/2"	63 mm	2 M	26.00(lbs)
BC10300S	#10x3"	76 mm	2 M	32.00(lbs)

Pull-out Test Data**

Gauge	2x2 Douglas	2x4 Redwood	1x3 Clear Pine	1" Plywood	3/4" Particleboard
#10	404	402	396	314	319


**GRABBER fasteners are not categorized as structural bolts. The figures listed above are ultimate average values achieved under independent laboratory conditions, and apply to GRABBER Line fasteners only. An appropriate safety factor must be determined by a qualified professional for design purposes.

PRODUCT DIMENSIONS (MILLIMETERS)

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#10	8.50	2.87	#2	3.78	3.20	5.00	8
	8.90	3.30		3.82	3.50	6.30	

STANDARD CORROSION TEST RESULTS

Finish	Test	Standard/Protocol	Results
304 Stainless Steel	Salt Spray Results	ASTM B117	1,500 hours, no red rust

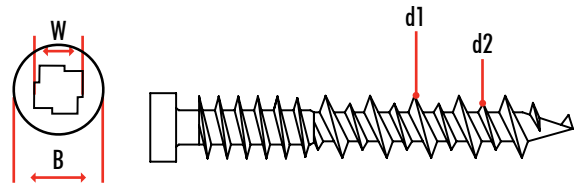

All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

