

**EXTERIOR WOOD**

Product #DM105

**Deckmaster Deck Board Screws** (1 OF 2)

For fastening Deckmaster brackets to deck boards

Finish - GRABBERGARD



Flat Head

Type 17  
Point

LOX #2

Square  
Drive**APPLICATIONS**

- ▶ Deckmaster Hidden Fastening System

**PRODUCT FEATURES**

- ▶ The flat head is designed specifically for wood applications
- ▶ Available in #2 Square, and #2 LOX® recess drive
- ▶ The average ultimate loads of the Deckmaster System with Screws installed at 60° angle. Doug fir to redwood with 1 1/4" screws is 1,012 lbs. Doug fir to redwood with 1 3/4" screws is 1,154 lbs. Pressure treated wood with 1 1/4" screws is 1,180 lbs. Pressure treated wood with 1 3/4" screws is 1,204 lbs.

**SPECIFICATIONS**

- ▶ Gauge - #10
- ▶ Length - 1" to 1-3/4"
- ▶ Head Type - Flat
- ▶ Recess Type - #2 Square
- ▶ Thread Type - Single Lead
- ▶ Finish - 302 Stainless Steel and GRABBERGARD
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified.

**INSTALLATION GUIDELINES**

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance - 4 amps minimum and 2500 RPM.
- ▶ The Flat head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or strip out of the work surface.

**EXTERIOR WOOD**

**Product #DM105**

**Deckmaster® Deck Board Screws (2 OF 2)**

**PRODUCT SIZES AND ORDERING INFORMATION**


Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
DM100G-100	#10x1"	25 mm	1200	13.00(lbs)
DM125G-100	#10x1-1/4"	32 mm	1200	20.00(lbs)
DM175G-100	#10x1-3/4"	45 mm	1200	20.00(lbs)

**PRODUCT DIMENSIONS (MILLIMETERS)**

Gauge	B Head Dia	Recess Depth	W Gauging Width	d Shank Dia	d1 Minor Dia	d2 Major Dia	TPI
#6	8.00	0.50	#2	2.68	2.25	3.75	8
	8.50	0.80		2.72	2.45	3.95	
#7	8.00	0.50	#2	2.93	2.50	4.05	8
	8.50	0.80		2.97	2.80	4.30	
#8	8.00	0.50	#2	3.18	2.80	4.30	8
	8.50	0.80		3.22	3.10	4.60	
#10	8.50	0.50	#2	3.78	3.20	5.00	8
	8.90	0.80		3.82	3.50	5.30	

**STANDARD CORROSION TEST RESULTS**

Finish	Test	Standard/Protocol	Results
GRABBERGARD	Salt Spray Results	ASTM B117	1,000 hours, no red rust
GRABBERGARD	Kesternich Results	DIN 50018, 2.0L	15 cycles, no red rust

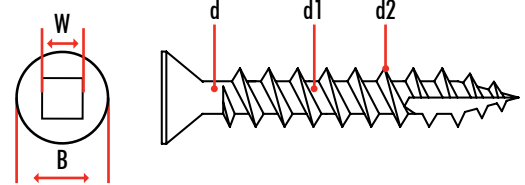

All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. The fasteners comply with ASME B18.6.1. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.

