



Flat Head Streaker® - Exterior

Sheathing, Subfloor, and Plywood to Light-Gauge Steel

GRABBER
CONSTRUCTION PRODUCTS



LOX®



Star



Flat Head



Streaker®
Point

Description Sheathing, subfloor, and plywood to light-gauge steel.

Specifications

- Size | Gauge:** #8
- Length:** 1 1/2 in. to 2 in.
- Head Type:** Flat Head
- Recess Type:** #2 LOX®, T25 Star
- Thread Type:** Fine, Single Lead
- Finish:** GrabberGard®, Stainless Steel

Quality Assurance: Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Compliance: The fasteners comply with ASTM C1513 performance requirements.

Applications

- Plywood or OSB to light-gauge steel runners
- Sheathing to light-gauge steel studs

Installation

- Use a standard screw gun with a depth sensitive nose piece. Suggested screw gun specification for optimal performance: size #8, up to 4,000 RPM.
- The head is fully seated when the top of the head is flush with the work surface.
- The fastener must penetrate beyond the steel three full thread pitches.
- Overdriving may result in failure of the fastener or strip-out.

Features

- Grabber's LOX® recess was designed for today's screw guns and for applications where high torque is required. LOX® will not strip out like most other recesses.
- Grabber's T25 Star recess provides a consistent, reliable performance in wood to light-gauge steel applications.
- The flat head design provides better holding power in sheathing to light-gauge steel applications.
- Extra-sharp, single lead 23° Streaker® point is designed to penetrate light-gauge steel quickly and easily.
- GrabberGard® exterior-grade coating provides additional protection against corrosion in most exterior applications.

Flat Head Streaker® - Exterior

Sheathing, Subfloor, and Plywood to Light-Gauge Steel



Standard Corrosion Test Results

Finish	Test	Standard/Protocol	Results
GrabberGard®	Salt Spray	ASTM B117	1,000 hrs., no red rust

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the Grabber Guide to Corrosion Resistance for Fasteners.


Pull-Out Test Data¹

Screw Gauge	TPI ²	Steel Gauge	Design Thickness	Tension	Shear
#8	15	25	0.0188 in.	39 lbs.	66 lbs.
		20	0.0346 in.	72 lbs.	164 lbs.

¹Test data values reported are allowable as determined by calculations and industry established test criteria, such as ICC-ES Acceptance Criteria and ASTM test standards. Please contact Grabber for detailed information about testing performed for specific products or if ultimate values are needed.

Sheet Steel Gauges

Gauge No.	Design Thickness	Millimeter Equivalent
25	0.0188 in.	0.4775 mm
20	0.0346 in.	0.8788 mm

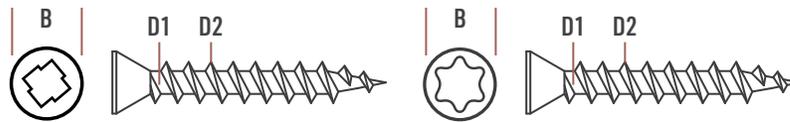

Product Dimensions

Screw Gauge	B Head Dia.	Recess	D1 Minor Dia.	D2 Major Dia.	TPI ²
#8	0.354 in.	#2 LOX®	0.120 in.	0.164 in.	14
	0.354 in.	T25 Star	0.120 in.	0.164 in.	14

²TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Ordering Information and Product Options

Item No.	Size	Recess	Head Diameter	TPI	Quantity	Weight	Special Features
GrabberGard® Gray							
CS8150LRG	8 x 1 1/2 in.	#2 LOX®	0.354 in.	14	1,000	5 lb.	Collated
CS8175LRG	8 x 1 3/4 in.	#2 LOX®	0.354 in.	14	1,000	5 lb.	
CS8200LRG	8 x 2 in.	#2 LOX®	0.354 in.	14	1,000	5 lb.	
CS8200TRG	8 x 2 in.	T25 Star	0.354 in.	14	1,000	5 lb.	
410 Stainless Steel							
CS8150SSZL	8 x 1 1/2 in.	#2 LOX®	0.354 in.	14	1,000	5 lb.	Collated

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller package sizes such as 5 lb. and 1 lb. Contact your local Grabber Branch or GrabberPro for more information.

Flat Head Streaker® - Exterior
PS1055 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC.
5255 W 11000 N., STE 100
HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks Grabber, GrabberGard, LOX, Streaker, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

