

## PRODUCT SUBMITTAL

**Submitted to:**

Project:

Date of Submittal:

**Submitted by, Contact name:**

Company:

Address:

Phone:

Email:

Approved

Approved as Noted

Not Approved

Comments:

By:

Date:

---

List of items from Table A submitted for the project:

--

## Product Family: PFF - Self-Piercing Flat Head Fine Thread

TABLE A

Item Number	Screw Size (#)	Length (in.)	Head Style	Head Diameter (in.)	TPI	Point Size/Style	Coating	Maximum Total Drilling Thickness (in.)	Drive Type	Bulk/Collated Quantity	Special Features
GPLY150	7	1-1/2	Flat	0.291	16	PLYLITE™	Yellow Zinc	0.033	#2 Phillips	7,500	PLYLITE™
GPLY200	7	2	Flat	0.291	16	PLYLITE™	Yellow Zinc	0.033	#2 Phillips	5,000	PLYLITE™
GPLY275	7	2-3/4	Flat	0.291	16	PLYLITE™	Yellow Zinc	0.033	#2 Phillips	3,000	PLYLITE™
CS8150JBWYZ	8	1-1/2	Flat	0.354	14	Stabber	Yellow Zinc	0.033	#2 LOX	1,000	Collated
CS8150LRG	8	1 1/2	Flat	0.354	14	Stabber	GrabberGard®	0.033	#2 LOX	1,000	Collated
S8150JBWYZ	8	1-1/2	Flat	0.354	14	Stabber	Yellow Zinc	0.033	#2 LOX	5,000	
CS8175LRG	8	1-3/4	Flat	0.354	14	Stabber	GrabberGard®	0.033	#2 LOX	1,000	Collated
CS8175LYZ	8	1-3/4	Flat	0.354	14	Stabber	Yellow Zinc	0.033	#2 LOX	1,000	Collated
CS8200JBWZ	8	2	Flat	0.354	14	Stabber	Clear Zinc	0.033	#2 LOX	1,000	Collated
CS8200JBWYZ	8	2	Flat	0.354	14	Stabber	Yellow Zinc	0.033	#2 LOX	1,000	Collated
CS8200LRG	8	2	Flat	0.354	14	Stabber	GrabberGard®	0.033	#2 LOX	1,000	Collated
CS8200TRG	8	2	Flat	0.354	14	Stabber	GrabberGard®	0.033	T25	1,000	Collated
CS8250JBWYZ	8	2-1/2	Flat	0.354	14	Stabber	Yellow Zinc	0.033	#2 LOX	1,000	Collated

Grabber screws manufactured in America are available as SPECIAL-ORDER INVENTORY. CONTACT GRABBER FOR CURRENT PRICE AND AVAILABILITY. For identification purposes, an "A" will be added to the end of the item number and "Made in America" will be printed on the label.

Prefixes: X = 1-lb, VB = 5-lb, BP = Blister Pack, C = Collated

Description: Self-Piercing Flat Head Fine Thread screw used for attaching wood to light-gauge (see TABLE A - Maximum Total Drilling Thickness) steel. Self-tapping Streaker is designed for penetration into light-gauge steel.

Directions: Use a standard screwgun with a depth sensitive nose piece. Suggested screwgun specification for optimal performance - Sizes #7 - 8, up to 4,000 RPM. For wood, the screw is fully seated with the top of the head is flush with the work surface. Overdriving may result in failure of the fastener. The fastener must penetrate beyond the metal a minimum of three full threads.

Corrosion: For Corrosion Resistance Testing Results, see TABLE B.

Certifications: All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. PFF fasteners comply with ASTM C1513 requirements.

## PFF - Self-Piercing Flat Head Fine Thread

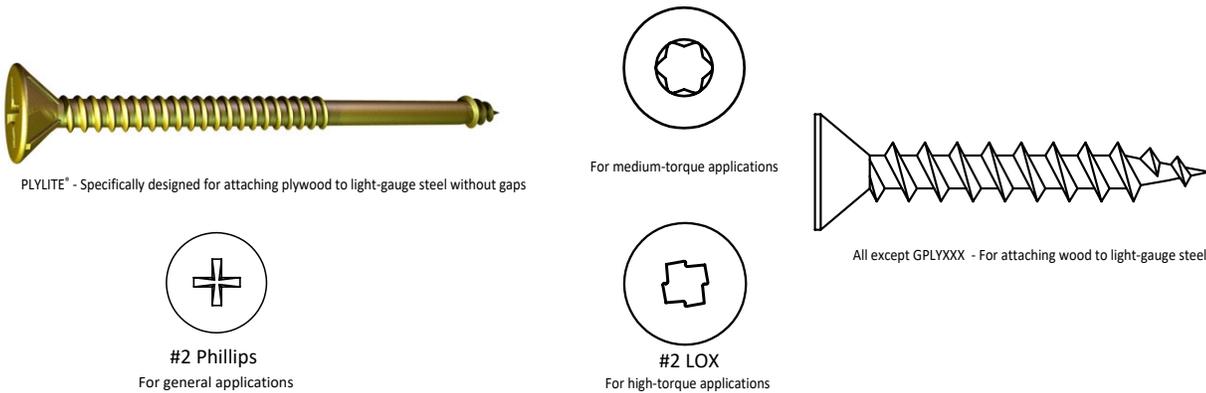


TABLE B

CORROSION RESISTANCE TESTING RESULTS			
Finish	Test	Standard/Protocol	Results (minimum)
ClearZinc	Salt Spray	ASTM B117	12 hours, no red rust
Yellow Zinc	Salt Spray	ASTM B117	24 hours, no red rust
GrabberGard®	Salt Spray	ASTM B117	1000 hours, no red rust

NOTE: Salt Spray Testing (SST) results are not intended to predict corrosion resistance in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool to compare different metals and different metal coatings in a tightly controlled highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the *Grabber Guide to Corrosion Resistance for Fasteners*.

Grabber's approved mills keep tight control over all production standards and processes. Grabber's mills are ISO 9001 ensuring Grabber fasteners meet or exceed the highest industry standards.

### TRADEMARKS:

The following registered trademarks used herein are owned by Grabber Construction Products, Inc.:

GRABBER®  
GrabberGard®  
LOX®  
PLYLITE™

### NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.