

## PRODUCT SUBMITTAL

**Submitted to:**

Project:

Date of Submittal:

**Submitted by, Contact name:**

Company:

Address:

Phone:

Email:

Approved

Approved as Noted

Not Approved

Comments:

By:

Date:

---

List of items from Table A submitted for the project:

--

## Product Family - PRF - Self-Piercing Reduced Modified Truss Head Fine Thread

**TABLE A**

Item Number	Screw Size (#)	Length (in.)	Head Style	Head Diameter (in.)	TPI	Point Size	Coating	Maximum Total Drilling Thickness (in.)	Drive Type	Bulk Quantity
FP101875XSC3	10	3/4	Reduced MTH	0.344	18	Sharp	Green GrabberGard®	0.033	X-Drive (SCR#1)	8,000
FP101875XSC35	10	3/4	Reduced MTH	0.344	18	Sharp	GrabberGard®	0.033	X-Drive (SCR#1)	8,000
FP101875XSG	10	3/4	Reduced MTH	0.344	18	Sharp	GrabberGard®	0.033	X-Drive (SCR#1)	8,000
FP101875XSYZ	10	3/4	Reduced MTH	0.344	18	Sharp	Yellow Zinc	0.033	X-Drive (SCR#1)	8,000
FP101875PSG	10	3/4	Reduced MTH	0.344	18	Sharp	GrabberGard®	0.033	#2 Phillips	8,000

Grabber screws manufactured in America are available as SPECIAL-ORDER INVENTORY. CONTACT GRABBER FOR CURRENT PRICE AND AVAILABILITY. For identification purposes, an "A" will added to the end of the item number and "Made in America" will be printed on the label.

Prefixes: C = Collated, X = 1-lb, VB = 5-lb, BP = Blister Pack

Suffix: 5 = Includes 5 bits.


Description: Self-Piercing CReduced Modified Truss Head screw with 4-serrations under head and notched upper threads used in light-gauge (see TABLE A - Maximum Total Drilling Thickness) metal-to-metal applications. Self tapping drill point is designed for penetration into heavy-gauge metal.

Directions: Use a standard screwgun with a depth sensitive nose piece. Suggested screwgun specification for optimal performance - Size #10 - #12, up to 4,000 RPM. The head is fully seated when the bearing surface of the head is flush with the work surface. Overdriving may result in failure of the fastener.

Corrosion: For Corrosion Resistance Testing Results, see TABLE B.

Certifications: All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. PCF fasteners comply with ASTM C1513 and ASTM C1002 requirements.

### PRF - Self-Piercing Reduced Modified Truss Head Fine Thread

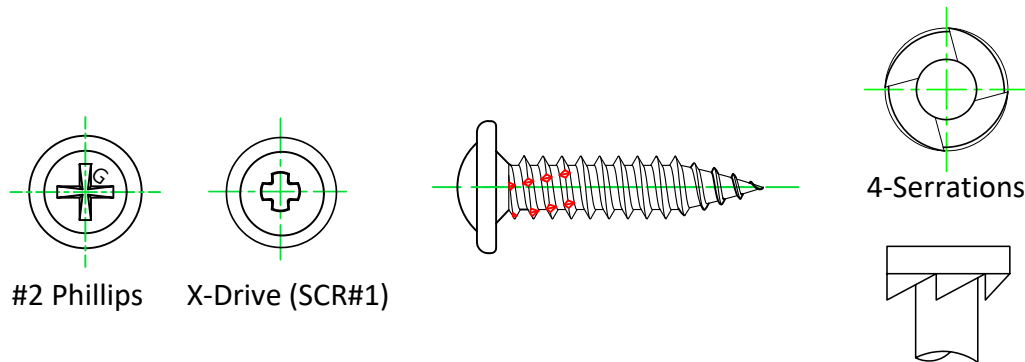

**TABLE B**

CORROSION RESISTANCE TESTING RESULTS			
Finish	Test	Standard/Protocol	Results (minimum)
YZ) Yellow Zinc	Salt Spray	ASTM B117	24 hours, no red rust
(G) GrabberGard	Salt Spray	ASTM B117	1000 hours, no red rust

NOTE: Salt Spray Testing (SST) results are not intended to predict corrosion resistance in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool to compare different metals and different metal coatings in a tightly controlled highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the *Grabber Guide to Corrosion Resistance for Fasteners*.

Grabber's approved mills keep tight control over all production standards and processes. Grabber's mills are ISO 9001 ensuring Grabber fasteners meet or exceed the highest industry standards.

#### TRADEMARKS:

The following trademarks used herein are owned by Grabber Construction Products, Inc.:

GRABBER®  
GrabberGard®

#### NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.