

## PRODUCT SUBMITTAL

**Submitted to:**

Project:

Date of Submittal:

**Submitted by, Contact name:**

Company:

Address:

Phone:

Email:

Approved

Approved as Noted

Not Approved

Comments:

--	--	--

By:

Date:

---

List of items from Table A submitted for the project:

--

## Product Family: PWF - Self-Piercing Wafer Head Fine Thread

TABLE A

Item Number	Screw Size (#)	Length (in.)	Head Style	Head Diameter (in.)	TPI	Point Style	Coating	Maximum Drilling Capacity (in.)	Drive Type	Bulk Quantity	Application	Special Features
GHS8114LG	8	1-1/4-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	#2 LOX	5,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head
GHS8158LG	8	1-5/8-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	#2 LOX	4,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head
GHS8158TG	8	1-5/8-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	T25	4,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head
GHS8238LG	8	2-3/8-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	#2 LOX	2,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head
CGHS8114LG	8	1-1/4-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	#2 LOX	1,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head, Collated
CGHS8158LG	8	1-5/8-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	#2 LOX	1,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head, Collated
CGHS8158TG	8	1-5/8-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	T25	1,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head, Collated
CGHS8238LG	8	2-3/8-in	Wafer	0.372-in	15	Streaker®	GrabberGard®	0.033-in	#2 LOX	1,000	High density/cement board to metal up to 0.033-in. or wood	8-Nibs Under Head, Collated

Grabber screws manufactured in America are available as SPECIAL-ORDER INVENTORY. CONTACT GRABBER FOR CURRENT PRICE AND AVAILABILITY. For identification purposes, an "A" will be added to the end of the item number and "Made in America" will be printed on the label.

Prefixes: X = 1-lb, VB = 5-lb, BP = Blister Pack, C = Collated

Description: Wafer head Streaker® fine thread screw used in light-gauge (see TABLE A - Maximum Total Drilling Thickness) steel or wood applications. The Streaker® (twin thread, single lead) design results in faster penetration into light-gauge steel or wood.

Directions: Use a standard screwgun with a depth sensitive nose piece. Suggested screwgun specification for optimal performance - Sizes #8, up to 4,000 RPM. Overdriving may result in failure of the fastener. For metal applications, the fastener must penetrate beyond the metal a minimum of three full threads.

Corrosion: For Corrosion Resistance Testing Results, see TABLE B.

Certifications: All GRABBER® screw products are manufactured in facilities that are ISO 9001 certified. PWF fasteners comply with ASTM C1513 requirements.

## PWF - Self-Piercing Wafer Head Fine Thread

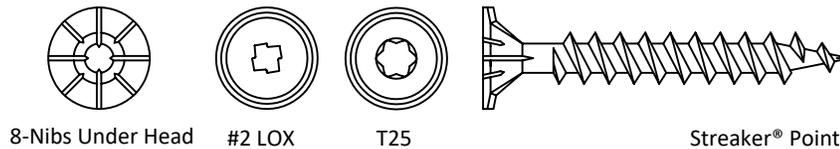


TABLE B

CORROSION RESISTANCE TESTING RESULTS			
Finish	Test	Standard/Protocol	Results (minimum)
GrabberGard®	Salt Spray	ASTM B117	1000 hours, no red rust

NOTE: Salt Spray Testing (SST) results are not intended to predict corrosion resistance in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool to compare different metals and different metal coatings in a tightly controlled highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the *Grabber Guide to Corrosion Resistance for Fasteners*.

Grabber's approved mills keep tight control over all production standards and processes. Grabber's mills are ISO 9001 ensuring Grabber fasteners meet or exceed the highest industry standards.

### TRADEMARKS:

The following registered trademarks used herein are owned by Grabber Construction Products, Inc.:

GRABBER®  
GrabberGard®  
Streaker®  
LOX®

### NOTICE:

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our Liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days of the date it was or reasonably should have been discovered.