






15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails




GRABBER®
CONSTRUCTION PRODUCTS





Wood-to-Wood Framing



Wood Siding to Wood Framing



General Wood Utility and
Pallet Construction

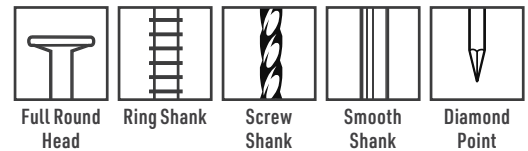

Full Round
Head

Ring Shank

Screw
Shank

Smooth
Shank

Diamond
Point

Description 15° Wire coil collated nails for framing, siding, and pallet construction.

Specifications

Size | Gauge: 0.083 in. to 0.131 in.
Length: 1 1/4 in. to 3 1/4 in.
Head Type: Full Round
Shank Type: Ring, Screw, Smooth
Finish: Bright, Electrogalvanized, Hot-Dip Galvanized, Stainless Steel, Thermal Diffusion Galvanized

Quality Assurance: Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Compliance: The fasteners comply with ASTM F1667 performance requirements.

Applications

- Wood-to-wood framing
- Wood siding to wood framing
- Pallet construction
- General wood utility construction

Installation

- Use with any 15° pneumatic coil nail gun.
- The head is fully seated when it is flush with the work surface.


15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails

GRABBER
CONSTRUCTION PRODUCTS

Features

- Full round head nails provide a larger load-bearing surface for framing and general construction.
- Smooth shank penetrates the wood easily and smoothly.
- Ring shank nails have robust holding power. As the nail penetrates wood, fibers lock around the grooves in the shank, creating a durable bond.
- Nails with screw or spiral shanks rotate during installation, increasing pull-out resistance.
- Diamond point is designed to easily drive into wood, and it helps prevent splitting.

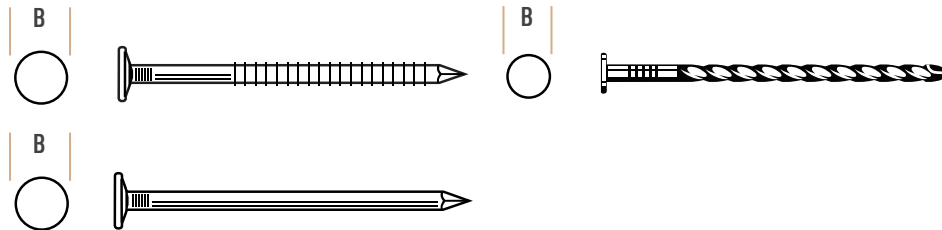

Product Dimensions

| B Head Diameter | Wire Diameter | Shank Type |
|-----------------|---------------|------------|
| 0.213 in. | 0.083 in. | Ring |
| 0.213 in. | 0.083 in. | Screw |
| 0.220 in. | 0.084 in. | Screw |
| 0.220 in. | 0.086 in. | Screw |
| 0.220 in. | 0.090 in. | Ring |
| 0.220 in. | 0.090 in. | Ring |
| 0.220 in. | 0.090 in. | Screw |
| 0.220 in. | 0.092 in. | Ring |
| 0.220 in. | 0.092 in. | Smooth |
| 0.220 in. | 0.093 in. | Ring |
| 0.248 in. | 0.099 in. | Smooth |
| 0.260 in. | 0.099 in. | Ring |
| 0.260 in. | 0.099 in. | Screw |
| 0.276 in. | 0.113 in. | Ring |
| 0.276 in. | 0.113 in. | Screw |
| 0.276 in. | 0.113 in. | Smooth |
| 0.276 in. | 0.120 in. | Ring |
| 0.276 in. | 0.120 in. | Screw |
| 0.276 in. | 0.120 in. | Smooth |
| 0.276 in. | 0.131 in. | Ring |
| 0.276 in. | 0.131 in. | Screw |
| 0.276 in. | 0.131 in. | Smooth |

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails

GRABBER
CONSTRUCTION PRODUCTS

Ordering Information and Product Options

| Item No. | Length | Head Type | Head Diameter | Wire Diameter | Shank Type | Amount | Weight | Special Features |
|-------------------|-----------|-----------|---------------|---------------|------------|--------|--------|---------------------------------|
| Bright | | | | | | | | |
| 13.5 Gauge | | | | | | | | |
| WC114083RGBR | 1 1/4 in. | Round | 0.213 in. | 0.083 in. | Ring | 14,000 | 29 lb. | Pallet/Utility Nails |
| WC112083RGBR | 1 1/2 in. | Round | 0.213 in. | 0.083 in. | Ring | 14,000 | 34 lb. | |
| WC112084SCBR | 1 1/2 in. | Round | 0.220 in. | 0.084 in. | Screw | 14,000 | 35 lb. | |
| WC134083SCBR | 1 3/4 in. | Round | 0.213 in. | 0.083 in. | Screw | 14,000 | 39 lb. | |
| WC134084SCBR | 1 3/4 in. | Round | 0.220 in. | 0.084 in. | Screw | 14,000 | 40 lb. | |
| WC134086SCBR | 1 3/4 in. | Round | 0.220 in. | 0.086 in. | Screw | 14,000 | 42 lb. | |
| WC200084SCBR | 2 in. | Round | 0.220 in. | 0.084 in. | Screw | 9,000 | 29 lb. | |
| 12.5 Gauge | | | | | | | | |
| WC112099SCBR | 1 1/2 in. | Round | 0.260 in. | 0.099 in. | Screw | 12,000 | 42 lb. | Pallet/Utility Nails |
| GAC4DS | 1 1/2 in. | Round | 0.248 in. | 0.099 in. | Smooth | 12,000 | 41 lb. | |
| WC134099SCBR | 1 3/4 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 36 lb. | High Load, Pallet/Utility Nails |
| WC134099SCBRHL | 1 3/4 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 36 lb. | |
| WC200099SCBR | 2 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 41 lb. | Siding Nails |
| WC200099SCBRHL | 2 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 41 lb. | High Load, Siding Nails |
| WC200090SCBR | 2 in. | Round | 0.220 in. | 0.090 in. | Screw | 9,000 | 34 lb. | Pallet/Utility Nails |
| WC214099SCBR | 2 1/4 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 45 lb. | Siding Nails |
| WC214099RGBR | 2 1/4 in. | Round | 0.260 in. | 0.099 in. | Ring | 9,000 | 45 lb. | |
| GAC7DS | 2 1/4 in. | Round | 0.248 in. | 0.099 in. | Smooth | 9,000 | 46 lb. | Pallet/Utility Nails |
| WC212099SCBR | 2 1/2 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 50 lb. | Siding Nails |
| WC212099SCBRHL | 2 1/2 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 50 lb. | High Load, Siding Nails |
| 11.5 Gauge | | | | | | | | |
| WC200113RGBR | 2 in. | Round | 0.276 in. | 0.113 in. | Ring | 9,000 | 54 lb. | Framing Nails |
| WC214113SCBR | 2 1/4 in. | Round | 0.276 in. | 0.113 in. | Screw | 6,750 | 44 lb. | |
| WC238113RGBR | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 4,000 | 28 lb. | |
| WC238113RB45 | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 4,500 | 32 lb. | |
| WC238113RSBR | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 4,000 | 28 lb. | |
| WC238113RGBRH | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 2,700 | 28 lb. | Siding Nails |
| WC238113BR | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Smooth | 4,000 | 28 lb. | Framing Nails |
| 11 Gauge | | | | | | | | |
| WC234120SCBR | 2 3/4 in. | Round | 0.276 in. | 0.120 in. | Screw | 4,000 | 36 lb. | Framing Nails |
| WC300120RGBR | 3 in. | Round | 0.276 in. | 0.120 in. | Ring | 4,000 | 39 lb. | |
| WC300120SCBR | 3 in. | Round | 0.276 in. | 0.120 in. | Screw | 4,000 | 39 lb. | |
| WC300120BR | 3 in. | Round | 0.276 in. | 0.120 in. | Smooth | 4,000 | 39 lb. | |
| WC314120SCBR | 3 1/4 in. | Round | 0.276 in. | 0.120 in. | Screw | 4,000 | 42 lb. | |
| WC314120BR | 3 1/4 in. | Round | 0.276 in. | 0.120 in. | Smooth | 4,000 | 42 lb. | |

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

| Item No. | Length | Head Type | Head Diameter | Wire Diameter | Shank Type | Amount | Weight | Special Features |
|---------------------------|-----------|-----------|---------------|---------------|------------|--------|--------|--------------------------|
| Bright (continued) | | | | | | | | |
| 10.5 Gauge | | | | | | | | |
| WC212131RSBR | 2 1/2 in. | Round | 0.276 in. | 0.131 in. | Ring | 4,500 | 44 lb. | Framing Nails |
| WC212131BR | 2 1/2 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,000 | 44 lb. | |
| WC300131SCBR | 3 in. | Round | 0.276 in. | 0.131 in. | Screw | 4,000 | 46 lb. | |
| WC300131BR | 3 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,000 | 46 lb. | |
| WC300131BR45 | 3 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,500 | 52 lb. | |
| WC300131BRH | 3 in. | Round | 0.276 in. | 0.131 in. | Smooth | 2,400 | 28 lb. | |
| WC314131SCBRH | 3 1/4 in. | Round | 0.276 in. | 0.131 in. | Screw | 2,700 | 50 lb. | High Load, Framing Nails |
| WC314131BR | 3 1/4 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,000 | 50 lb. | Framing Nails |
| WC314131BR45 | 3 1/4 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,500 | 56 lb. | |
| WC312131BR | 3 1/2 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,000 | 39 lb. | |
| Hot-Dip Galvanized | | | | | | | | |
| 13 Gauge | | | | | | | | |
| WC112092RGHDG | 1 1/2 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 11 lb. | Pallet/Utility Nails |
| WC112093RGHDG | 1 1/2 in. | Round | 0.220 in. | 0.093 in. | Ring | 3,600 | 13 lb. | Siding Nails |
| WC134092RGHDG | 1 3/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 13 lb. | |
| WC134092RSHDG | 1 3/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 13 lb. | |
| WC200092RGHDG | 2 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 14 lb. | |
| WC200092RSHDG | 2 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 14 lb. | |
| WC214092RGHDG | 2 1/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 16 lb. | |
| WC214092HDG | 2 1/4 in. | Round | 0.220 in. | 0.092 in. | Smooth | 3,600 | 16 lb. | |
| WC212092RGHDG | 2 1/2 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 17 lb. | |
| 12.5 Gauge | | | | | | | | |
| WC200099RGHDG | 2 in. | Round | 0.260 in. | 0.099 in. | Ring | 9,000 | 41 lb. | Siding Nails |
| WC214099RSHDG | 2 1/4 in. | Round | 0.260 in. | 0.099 in. | Ring | 9,000 | 45 lb. | |
| WC214099SCHDG | 2 1/4 in. | Round | 0.260 in. | 0.099 in. | Screw | 9,000 | 45 lb. | Framing Nails |
| WC238099SCHDG | 2 3/8 in. | Round | 0.260 in. | 0.099 in. | Screw | 4,000 | 21 lb. | |
| WC238099RGHDG | 2 3/8 in. | Round | 0.260 in. | 0.099 in. | Ring | 4,000 | 21 lb. | |
| 11.5 Gauge | | | | | | | | |
| WC200113HDG | 2 in. | Round | 0.276 in. | 0.113 in. | Smooth | 2,700 | 24 lb. | Siding Nails |
| WC238113HDGH | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Smooth | 2,700 | 28 lb. | |
| WC238113RGHDG | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 4,000 | 28 lb. | Framing Nails |
| WC212131RGHDG | 2 1/2 in. | Round | 0.276 in. | 0.131 in. | Ring | 3,600 | 39 lb. | Siding Nails |
| 11 Gauge | | | | | | | | |
| WC300120RGHDG | 3 in. | Round | 0.276 in. | 0.120 in. | Ring | 4,000 | 39 lb. | Framing Nails |
| WC300120RGHDGH | 3 in. | Round | 0.276 in. | 0.120 in. | Ring | 2,400 | 23 lb. | High Load, Framing Nails |
| WC314120RGHDG | 3 1/4 in. | Round | 0.276 in. | 0.120 in. | Ring | 4,000 | 42 lb. | Framing Nails |
| WC314120SCHDG | 3 1/4 in. | Round | 0.276 in. | 0.120 in. | Screw | 4,000 | 42 lb. | |
| WC314120HDG | 3 1/4 in. | Round | 0.276 in. | 0.120 in. | Smooth | 4,000 | 45 lb. | |
| 10.5 Gauge | | | | | | | | |
| WC212131HDG | 2 1/2 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,000 | 39 lb. | Framing Nails |
| WC300131HDG | 3 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,000 | 46 lb. | |
| WC314131HDG | 3 1/4 in. | Round | 0.276 in. | 0.131 in. | Smooth | 4,000 | 50 lb. | |

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails

GRABBER
CONSTRUCTION PRODUCTS

Ordering Information and Product Options (continued)

| Item No. | Length | Head Type | Head Diameter | Wire Diameter | Shank Type | Amount | Weight | Special Features |
|-------------------------------------|-----------|-----------|---------------|---------------|------------|--------|--------|------------------|
| Thermal Diffusion Galvanized | | | | | | | | |
| 13 Gauge | | | | | | | | |
| WC134092RSTDG | 1 3/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 13 lb. | Siding Nails |
| WC134092RGTDG | 1 3/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 13 lb. | |
| WC200092RGTDG | 2 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 14 lb. | |
| WC200099RGTDG | 2 in. | Round | 0.220 in. | 0.092 in. | Ring | 9,000 | 41 lb. | |
| WC214092RGTDG | 2 1/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 16 lb. | |
| 11.5 Gauge | | | | | | | | |
| WC238113RGTDG | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 4,000 | 28 lb. | Framing Nails |
| 11 Gauge | | | | | | | | |
| WC300120RGTDG | 3 in. | Round | 0.276 in. | 0.120 in. | Ring | 4,000 | 39 lb. | Framing Nails |
| Electrogalvanized | | | | | | | | |
| 13 Gauge | | | | | | | | |
| WC134092RGEG | 1 3/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 31 lb. | Siding Nails |
| WC200092RGEG | 2 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 14 lb. | |
| WC200099RGEG | 2 in. | Round | 0.260 in. | 0.099 in. | Ring | 9,000 | 41 lb. | |
| WC214092RGEG | 2 1/4 in. | Round | 0.220 in. | 0.092 in. | Ring | 3,600 | 16 lb. | |
| WC214092EG | 2 1/4 in. | Round | 0.220 in. | 0.092 in. | Smooth | 3,600 | 16 lb. | |
| WC214092EG9M | 2 1/4 in. | Round | 0.220 in. | 0.092 in. | Smooth | 9,000 | 39 lb. | |
| 11.5 Gauge | | | | | | | | |
| WC238113RGEG | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 4,500 | 31 lb. | Framing Nails |
| WC238113RGEG4 | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 4,000 | 28 lb. | |
| 11 Gauge | | | | | | | | |
| WC300120RGEG | 3 in. | Round | 0.276 in. | 0.120 in. | Ring | 4,500 | 44 lb. | Framing Nails |
| WC300120SCEG | 3 in. | Round | 0.276 in. | 0.120 in. | Screw | 4,000 | 39 lb. | |
| 10.5 Gauge | | | | | | | | |
| WC212131RGEG | 2 1/2 in. | Round | 0.276 in. | 0.131 in. | Ring | 4,500 | 44 lb. | Framing Nails |
| WC314131EGR45 | 3 1/4 in. | Round | 0.276 in. | 0.131 in. | Ring | 4,500 | 56 lb. | |
| WC314131EGR45M | 3 1/4 in. | Round | 0.276 in. | 0.131 in. | Ring | 4,500 | 56 lb. | |

15° Wire Coil Collated Nails

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

| Item No. | Length | Head Type | Head Diameter | Wire Diameter | Shank Type | Amount | Weight | Special Features |
|------------------------|------------|-----------|---------------|---------------|------------|--------|--------|------------------|
| Stainless Steel | | | | | | | | |
| 13 Gauge | | | | | | | | |
| WC112092RGSS | 1 1/2 in. | Round | 0.220 in. | 0.092 in. | Ring | 900 | 4 lb. | Siding Nails |
| SSWC112093RG | 1 1/2 in. | Round | 0.220 in. | 0.093 in. | Ring | 3,600 | 17 lb. | |
| WC134090RGSS | 1 3/4 in. | Round | 0.220 in. | 0.090 in. | Ring | 3,600 | 16 lb. | |
| WC175090RSSSS | 1 3/4 in. | Round | 0.220 in. | 0.090 in. | Ring | 3,600 | 13 lb. | Framing Nails |
| SSWC134090RG | 1 3/4 in. | Round | 0.220 in. | 0.090 in. | Ring | 9,000 | 40 lb. | |
| SSWC2316090RG | 2 3/16 in. | Round | 0.220 in. | 0.090 in. | Ring | 9,000 | 50 lb. | Framing Nails |
| WC214090RGSS | 2 1/4 in. | Round | 0.220 in. | 0.090 in. | Ring | 3,600 | 17 lb. | Siding Nails |
| 12.5 Gauge | | | | | | | | |
| WC175099RSSSS | 1 3/4 in. | Round | 0.260 in. | 0.099 in. | Ring | 3,600 | 15 lb. | Framing Nails |
| WC200099RGSS | 2 in. | Round | 0.260 in. | 0.099 in. | Ring | 3,600 | 16 lb. | Siding Nails |
| WC225099RSSSS | 2 1/4 in. | Round | 0.260 in. | 0.099 in. | Ring | 3,600 | 18 lb. | Framing Nails |
| 11.5 Gauge | | | | | | | | |
| SSWC238113RG | 2 3/8 in. | Round | 0.276 in. | 0.113 in. | Ring | 1,000 | 7 lb. | Framing Nails |
| 11 Gauge | | | | | | | | |
| SSWC300120RG | 3 in. | Round | 0.276 in. | 0.120 in. | Ring | 4,000 | 40 lb. | Framing Nails |
| SSWC314120RG | 3 1/4 in. | Round | 0.276 in. | 0.120 in. | Ring | 4,000 | 42 lb. | |

Note: Product availability is subject to change without prior notice, and the availability of products may differ from what is printed in literature and displayed on our website.

15° Wire Coil Collated Nails
PS1070 USA-ENG/Rev. 05-25

GRABBER CONSTRUCTION PRODUCTS, INC.
5255 W 11000 N., STE 100
HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks Grabber, and Stylized Gon Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

