
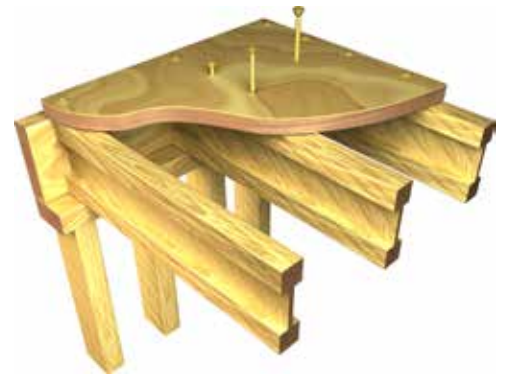


**INTERIOR WOOD**

Product #282

**Subfloor Screws (collated)** (1 OF 2)**Professional wood screw for interior and exterior applications****Finish - Black/Gray Phosphate and Yellow Zinc**

Flat Head

23° Streaker®  
Point

LOX #2



LOX #3

**APPLICATIONS**

- ▶ Plywood, OSB, and other subfloor materials to wood joists

**PRODUCT FEATURES**

- ▶ Self tapping STREAKER® point is designed for penetration into wood
- ▶ Flat head provides a flush finished surface LOX® recess does not require a magnetic bit tip holder

**SPECIFICATIONS**

- ▶ Gauge – #8
- ▶ Lengths – 1-3/4" to 3"
- ▶ Point – STREAKER®
- ▶ Head Type – Flat
- ▶ Recess – LOX®
- ▶ Thread Type – Double Lead
- ▶ Finish – Gray Phosphate, Clear and Yellow Zinc
- ▶ GRABBER® screws are manufactured in an ISO 9001 and ISO 14001 certified and approved factory.

**INSTALLATION GUIDELINES**

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance – 4 amps minimum and RPM range of 0 to 4,000.
- ▶ The Flat head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or stripout of the work surface.
- ▶ The fastener must penetrate beyond the metal a minimum of three thread pitches.

**INTERIOR WOOD**

Product #282

**Subfloor Screws (collated)** (2 OF 2)

**PRODUCT SIZES AND ORDERING INFORMATION**

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
C7125UL2	#7x1-1/4"	32 mm	1000	5.00(lbs)
C8175L3YZ	#8x1-3/4"	45 mm	1000	9.00(lbs)
C8200L3YZ	#8x2"	51 mm	1000	10.00(lbs)
C8250L3YZ	#8x2-1/2"	63 mm	1000	12.00(lbs)
C8300L3YZ	#8x3"	76 mm	1000	12.00(lbs)


\*Available in collated only

**PRODUCT DIMENSIONS (MILLIMETERS)**

Gauge	B Head Dia	W Gauging Width	d1 Minor Dia	d2 Major Dia	TPI
#7	8.8	#2	2.9	3.8	9
#8	8.8	#3	2.9	4.6	9

**STANDARD CORROSION TEST RESULTS**

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, No Red Rust
Yellow Zinc	Salt Spray Results	ASTM B117	48 hours, No Red Rust

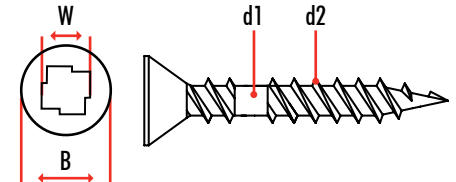

All GRABBER® screw products are manufactured in facilities that are ISO 90012 and ISO 14001 certified and approved. ©2012 GRABBER Construction Products, Inc. GRABBER®, STREAKER®, DRIVALL®, LOX®, GRABBERGARD® and SCAVENGER® are registered trademarks of Grabber Construction Products, Inc.